
Black Eagle Maverick 2 Group

Installation Requirements

SIMONELLI | GROUP
NORTH AMERICA

☐ Water

- 3/8” dedicated cold water line with shut-off valve and compression fitting.
- Water hardness 3gpg or 50 ppm.
- Line pressure 2-4bar, cold water.
- Water flow rate Minimum 1 GPM
- Filtration ≤ 1.0 micron
- TDS 50-250 ppm
- Alkalinity 10-150 ppm
- Chlorine ≤ 0.50 ppm
- PH 6.5-8.5




Shut off valve



Nema L6-30
(receptacle)
Twist

☐ Power

- Volts: 220 (range of 208-240)
- Watts: 6900
- Amp draw: 30
- Receptacle: Nema L6-30
- Outlet needs to be within 3ft
- GFEP breaker rated 208-240V, 30A, 30mA required

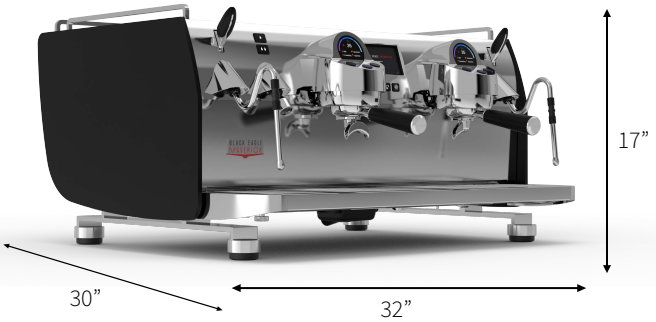


☐ Drain

- Open gravity drain of minimum 1.25 inch I.D., within 4 feet of the machine.

☐ Counter Space & Drain Hole Location

- Height: 17 in
- Depth: 30 in
- Width: 32 in

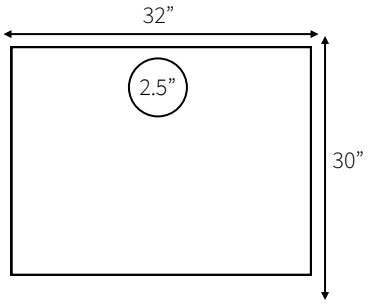

I, the customer, understand that these requirements must be in when the installer arrives. Failure to have the site ready will result in additional service and travel charges, and may cause further delays in installation.

Customer Name: _____ Signature: _____

Company Name: _____

Phone: _____ Email: _____ Sales Order: _____

SIMONELLI | USA
www.simonelliusa.com
6940 Salashan Parkway Ferndale, WA 98248
(p) 360-366-2226 (f) 360-366-4015

NSF / ANSI Std.4